

EDC2-DFT

HIGH-CANDELA EVERYDAY CARRY FLASHLIGHT



700 LUMENS



100,000 CANDELA



2.75 HOURS



632 METERS



BEAM PATTERN



MULTIPLE
SETTINGS



DUAL FUEL



RECHARGEABLE



IPX7

DESCRIPTION

SureFire's Everyday Carry Series punches deep into darkness with the EDC2-DFT, a Dual Fuel, high-candela handheld flashlight. The EDC2-DFT delivers an impressive beam designed explicitly for long-distance illumination in a remarkably compact form factor.

With a blinding, peak beam intensity of 100,000 candela using the included SF18650B rechargeable lithium-ion battery or 90,000 candela with two 123A batteries, the EDC2-DFT delivers the farthest-reaching beam of any compact SureFire EDC handheld light. It also maintains ample spill light for situational awareness. In addition, the EDC2-DFT offers more runtime by virtue of its more energy-dense power sources.

Constructed of lightweight aerospace aluminum, Mil-Spec hard-anodized, and O-ring sealed to keep out the elements, the body and tailcap are also knurled for a secure grip. A sturdy, two-way clip offers the added flexibility of bezel-up or bevel-down carry.

The EDC2-DFT delivers SureFire quality, performance, and dependability in an everyday carry flashlight that provides peace of mind by helping you see farther into the unknown.

FEATURES

- Precision engineered, smooth parabolic reflector produces a high-candela, far-reaching beam on high-output ideal for target identification at long distances
- Low-output ideal for administrative tasks and extended runtime
- Mil-Spec hard-anodized aluminum body and tempered window make it light rugged and durable
- Body and tailcap are knurled for a secure grip
- Two-way clip finished in black oxide permits bezel-up or bevel-down carry
- Meets IPX7 waterproof test standard at 1 meter for 30 minutes
- Note: SF18650B battery required for 700-lumen output, 100,000 candela, 2.75 hours runtime, and 632-meter beam distance

PART# / UPC

EDC2-DFT-BK

084871331524



SPECIFICATIONS	EDC2-DFT	
	COLOR	Black
	OUTPUT	SF18650B: 25 / 700 lumens 2x123A: 25 / 600 lumens
	RUNTIME	SF18650B: 46.5 / 2.75 hours 2x123A: 46.5 / 1.75 hours
	PEAK BEAM INTENSITY	SF18650B: 100,000 candela 2x123A: 90,000 candela
	BEAM DISTANCE	SF18650B: 632 meters 2x123A: 600 meters
	CONSTRUCTION	Aluminum
	FINISH	Hard Anodized (MIL-A-8625 Type III, Class 2)
	WEIGHT (w/SF18350 battery)	5.6 oz (158.8 g)
	LENGTH	5.91 in (15 cm)
	BEZEL DIAMETER	1.258 in (3.19 cm)
	BATTERIES	1x SF18650B (incl) or 2x123A
	SWITCHING	Click switch

All performance claims tested to ANSI/NEMA FL1-2019 Standard.



THE WORLD'S FINEST ILLUMINATION TOOLS, SUPPRESSORS, & TACTICAL PRODUCTS™

18300 Mt. Baldy Circle, Fountain Valley, CA 92708 | 714-545-9444 | Fax: 714-545-9537 | surefire.com

Actual product may vary from photo. Prices and specifications subject to change without notice. | Export of the product(s) shown herein must comply with the appropriate U.S. Government Jurisdiction(s) and Regulation(s).

©2023 SureFire, LLC JAN

PACKAGING SPECS



TYPE	Blister Card - Kraft Stock
HEIGHT	10 in (25.4 cm)
WIDTH	4 in (10.1 cm)
DEPTH	1.5 in (3.8 cm)



123A LITHIUM BATTERIES

Available in 2, 6, 12-packs and bulk options



SC1 SPARE BATTERY CARRIER


Other appropriate models also available



F26 AND F27 FILTERS

Red & Blue filters for 1.0-1.39" bezels

BODY SPECS

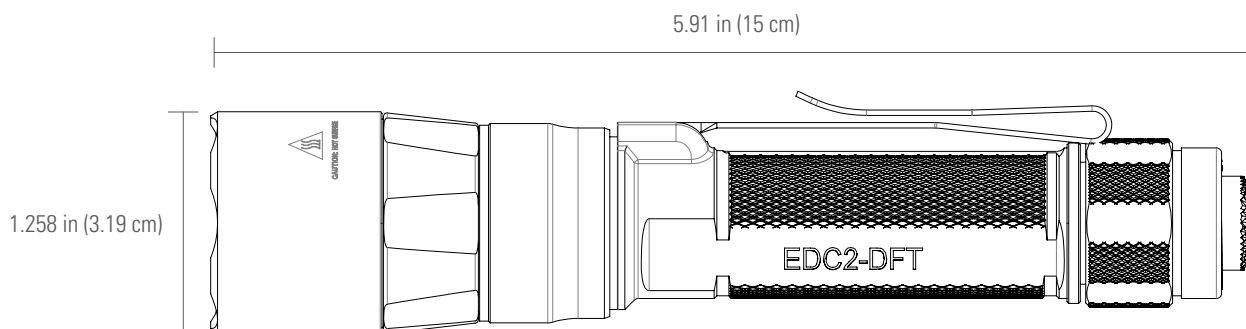

SF18650B	RATING/PERFORMANCE	COMMENTS
TYPE	Protected 18650	Internal Projection / Safety PCB
VOLTAGE	3.6V	
CERTIFICATION	CE, PSE, UN38.3	
CHARGE END VOLTAGE	4.20V	Max charge voltage
CHEMISTRY	Lithium-ion	
DIMENSIONS	69.4 x 18.6 mm	Diameter x Height
DISCHARGE END VOLTAGE	2.50V	
DISCHARGE RATE	8-10A	
ENERGY	12.6 Wh	
LITHIUM CONTENT	1.05 g	
OPERATING TEMP RANGE (CHARGING)	0-45°C, 65%±25%RH	
OPERATING TEMP RANGE (DISCHARGING)	-20°C-+60°C, 65%±25%RH	
RATED CAPACITY	3.5Ah	
STANDARD CHARGE RATE	Charging through USB can take over 8 hours if fully depleted. Approximately 5 hours of flashlight cutoff	
STORAGE TEMP RANGE	0-35°C 60±25%RH	
USB CHARGE CURRENT	600mA ± 100mA	
USB CHARGE VOLTAGE	5.0V ± 0.2V	
WEIGHT	1.7 oz (49 g)	

18650 Battery Charger Specification Requirements:

1. Use only a smart charger that uses a constant current/constant voltage charge cycle
2. Output of 4.2VDC, with charge current output of 0.5 to 2A



MIL-STD



THE WORLD'S FINEST ILLUMINATION TOOLS, SUPPRESSORS, & TACTICAL PRODUCTS®

18300 Mt. Baldy Circle, Fountain Valley, CA 92708 | 714-545-9444 | Fax: 714-545-9537 | surefire.com

Actual product may vary from photo. Prices and specifications subject to change without notice. | Export of the product(s) shown herein must comply with the appropriate U.S. Government Jurisdiction(s) and Regulation(s).